



## Light and Heavy Adjustable Power Saving Overlock Machine



Jack Wechat



Jack Facebook





E45

2019.10

**JACK SEWING MACHINE CO.,LTD.**

No. 15 South Airport Road, Jiaojiang District, Taizhou, Zhejiang, PRC  
TEL: 0086-576-88177782 88177767  
FAX: 0086-576-88177787

E-mail: [sales@chinajack.com](mailto:sales@chinajack.com)  
[www.chinajack.com](http://www.chinajack.com)

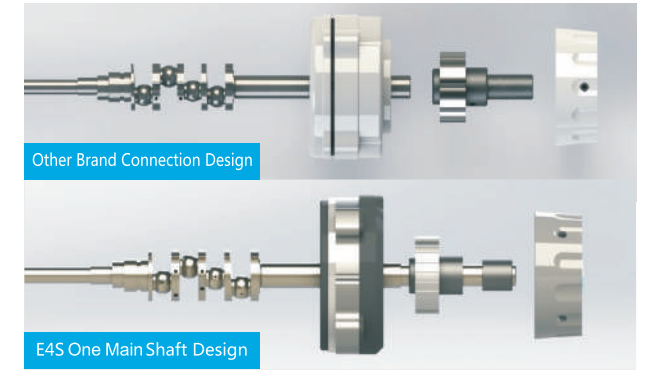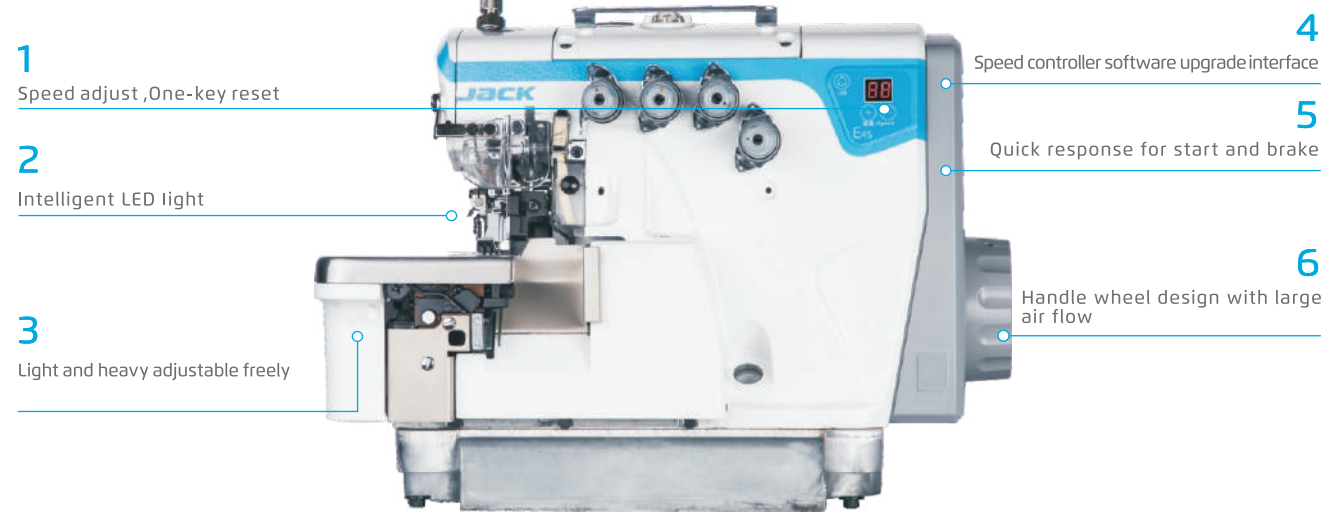


## 4 One-key reset, easy learn and use

With smart panel design like one-key reset, led light adjust, easier for parameter adjusting and operator learning.


## 5 One Main shaft design, stable and fast

Reduce the torque of the machine and ensure more stable running, sewing speed faster and more durable.

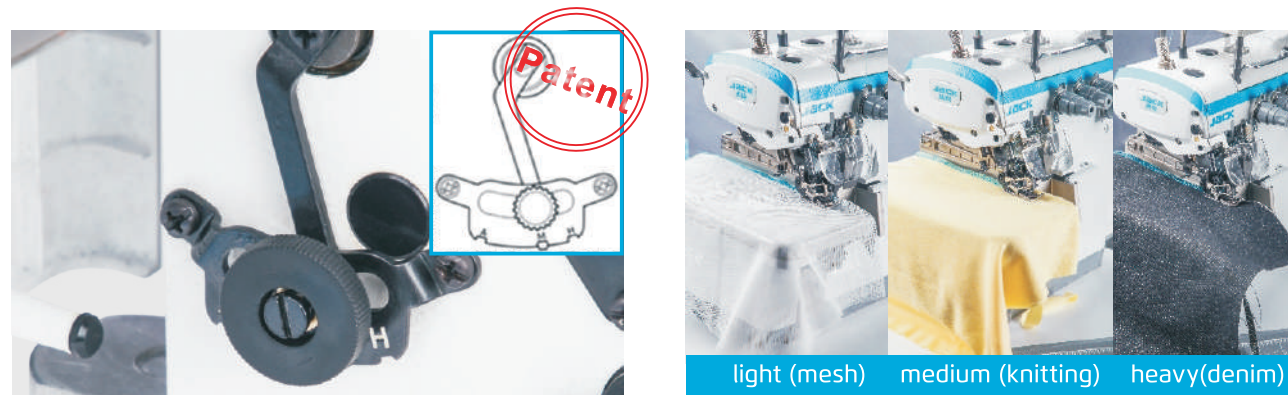

## 1 Light and heavy adjustable freely ,suitable for light to heavy duty

Easily convert from A-grade light material , M-grade medium material to H-grade heavy duty material.meet the demands of different changing orders like mesh, knitting and jeans,etc.

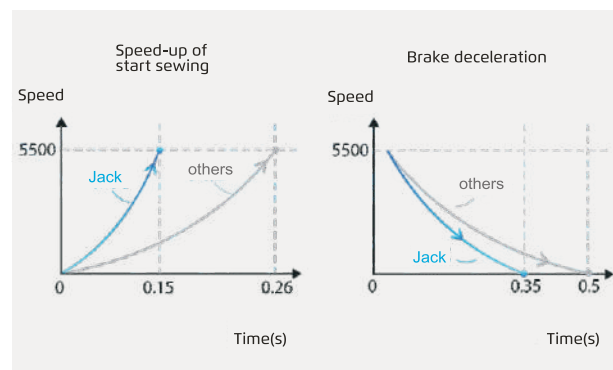

## 2 Super quick response for start and brake, strong and powerful

Shorter 40-50% for comprehensive start and brake response time, sewing speed experience is light and fast, increase income efficiently.



## 3 Needle bar avoid oil-leakage ,clean sewing

Enclosed needle bar mechanism and special oil seal for the feedbar, avoids oil leakage and ensure clean sewing.

## Specification

Model	Needle	Needle No.	Thread No.	Needle Distance (mm)	Stitch Width (mm)	Stitch Length (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
E4S-2(Fabric Joint Seaming)	11#	1	2	-	6	4	0.7-2	3.5	5500	525*360*510	28/36
E4S-02x250(Pocket Binding Seaming)	14#	2	4	5	-	4	0.7-2	3.5	5500	525*360*510	28/36
E4S-3-02/233(Plain Seaming)	11#	1	3	-	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-3-82/233(Back Latching)	11#	1	3	-	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-3-32R/233(Narrow Sewing)	9#	1	3	-	1.5	4	0.7-2	5	5500	525*360*510	28/36
E4SWF-3-02/213(Non-woven Material)	14#	1	3	-	4	8.5	-	5.5	5500	525*360*510	28/36
E4S-4-M03/333(Plain Seaming)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4S-4-83/323(Back Latching)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4S-4-M03/333/H/M(Heavy Duty)	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525*360*510	28/36
E4SMJ-4-53/233(Towel Ending)	11#	2	4	2	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-53/233(Tape Attaching Seaming)	14#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-02A/233(Light material)	11#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-03/233(5x5 Stitch)	14#	2	5	5	5	4	0.7-2	6	5500	525*360*510	28/36
E4S-5-03/333(3x4 Stitch)	14#	2	5	3	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-5-M04/435(Especially For Denim )	19#	2	5	5	6	5	0.8-1.5	7	5500	525*360*510	28/36
E4S-5-A04/435(Extra Heavy Duty)	19#	2	5	5	6	5	0.8-1.5	7	5500	525*360*510	28/36
E4S-6-03/333(Plain Seaming)	11#	3	6	3×2	4	4	0.7-2	5	5500	525*360*510	28/36
E4S-6-M04/435(Especially For Denim)	19#	3	6	5×2.5	3.5	5	0.8-1.5	7	5500	525*360*510	28/36

Note:H/M suitable for light and heavy; optional device KS (vertical suction device) and KH(horizontal suction device); machine volume:525\*360\*630(mm), weight 28/39(kg)